

GENERAL DRAWING NOTES:

1. Material:

- a. Muntz Metal Alloy Number 280 or Naval Brass Alloy Number 464 with a minimum wall thickness of 3/32" (.09").

2. Finishes:

- a. Available in Polished, #4 Satin, #6 Satin, Non-Directional (Jitterbug) & Bead Blasted finishes.

3. Doors:

- a. Standard door thickness is 2".
- b. Available stile width: 1 5/32" minimum.
- c. Available top rail heights: 4-3/4" minimum.
- d. Available bottom rail heights: 4 3/4" minimum (10" recommended to comply with ADA guidelines).



4. Frames:

- a. See details following for 3" x 6" nominal profile.
- b. Optional 3" x 5" nominal Profile available (the 1" reduction is taken off the pull side), see details 1A, 7A, 12A & 17A on Page 10.
- c. Optional 1 1/8" x 6" (or 5") nominal Profile header available, see detail 27B on Page 12.
Note: mortise is required at surrounding material for balanced hardware.
- d. Glass thickness may vary as desired. See details on page 14.
- e. Glass location may vary as desired. See detail 4 on page 6, and 16 on page 8.*
- f. For multi-light/true divided construction (I-2), Intermediate vertical and horizontal muntins (1/4 x 2" minimum) see details 15 on page 8 and 20 on page 9.



5. Threshold and floorbox types: see details on pages 16 & 18.

6. Door in open position and door projection: see detail 22 on page 15 and detail 33 on page 17.



Concealed Shafts / Framed Sidelight and Transom (I-1)

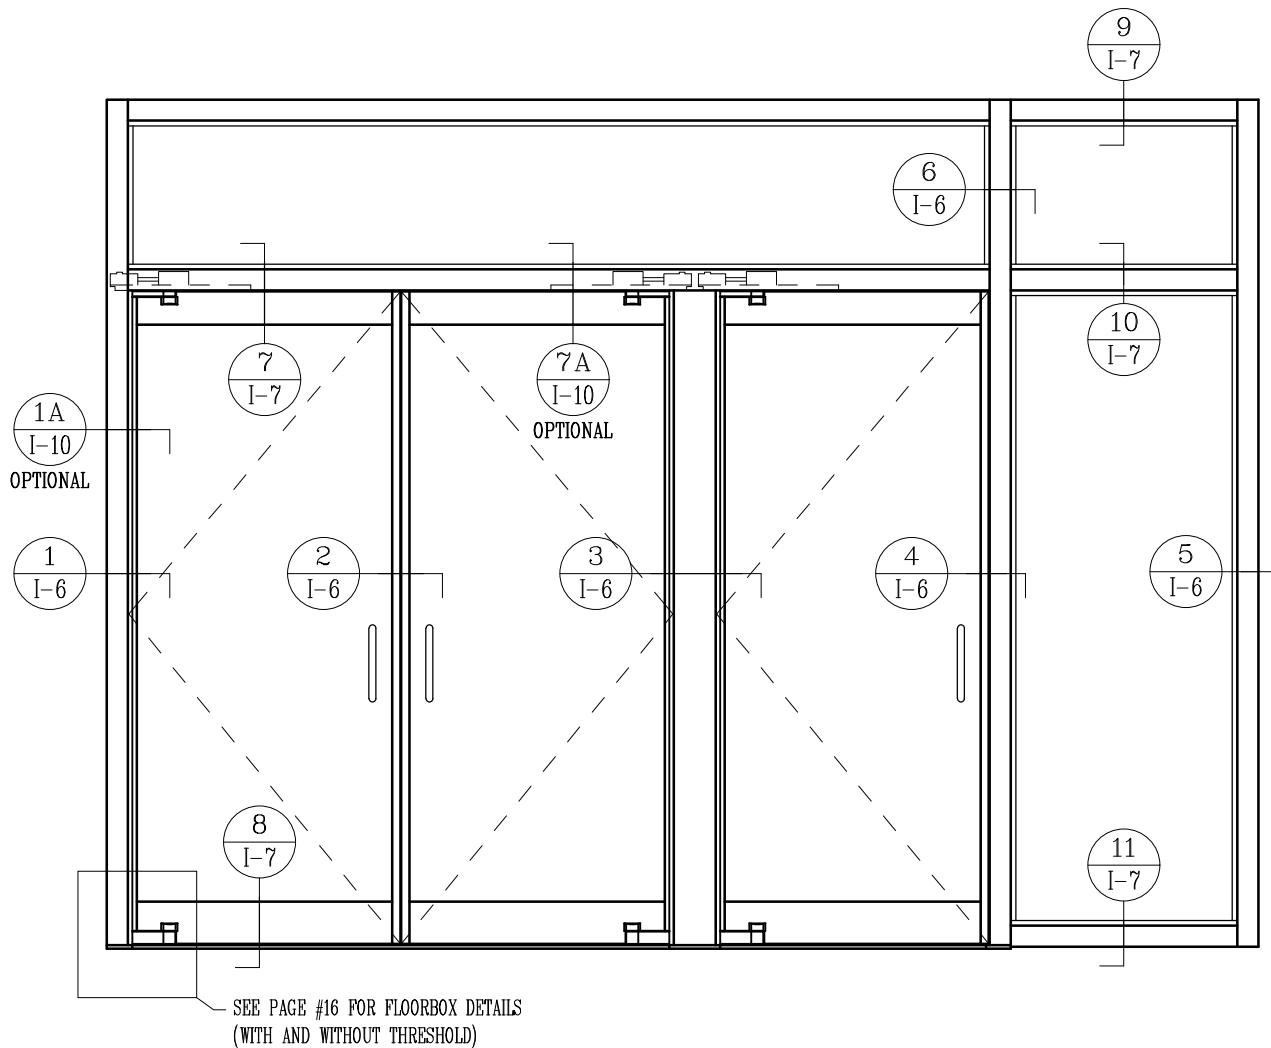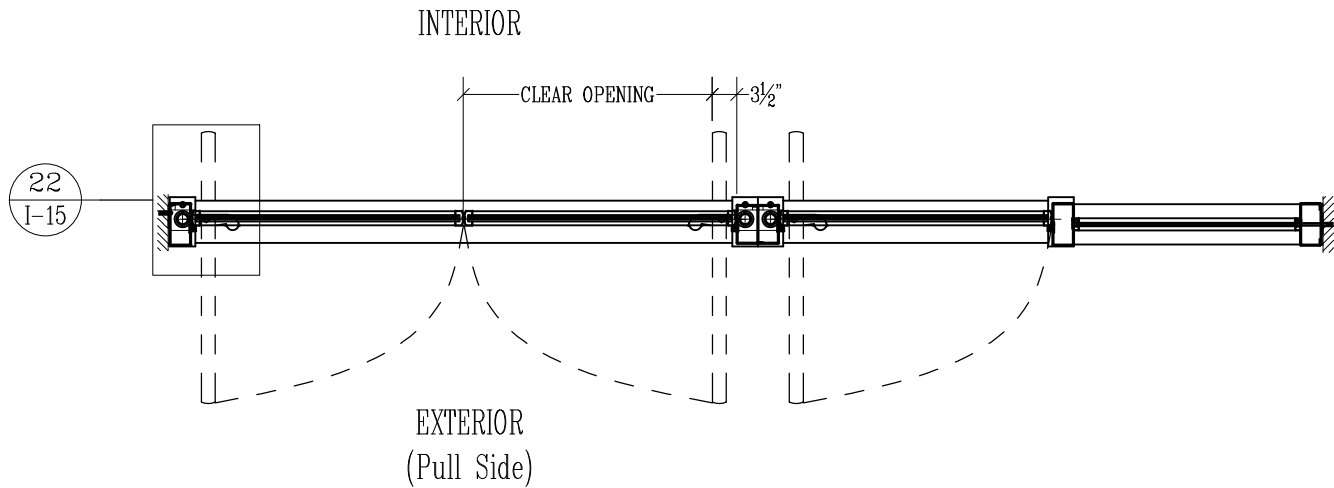


Concealed Shafts / Framed Multi-Light Sidelight (I-2)

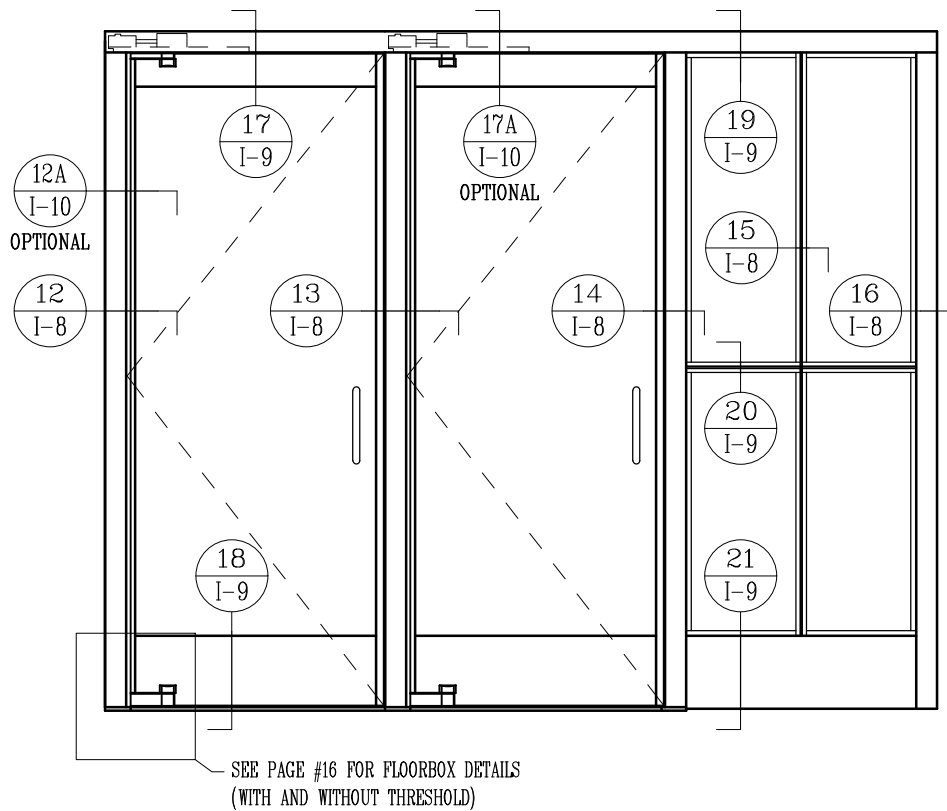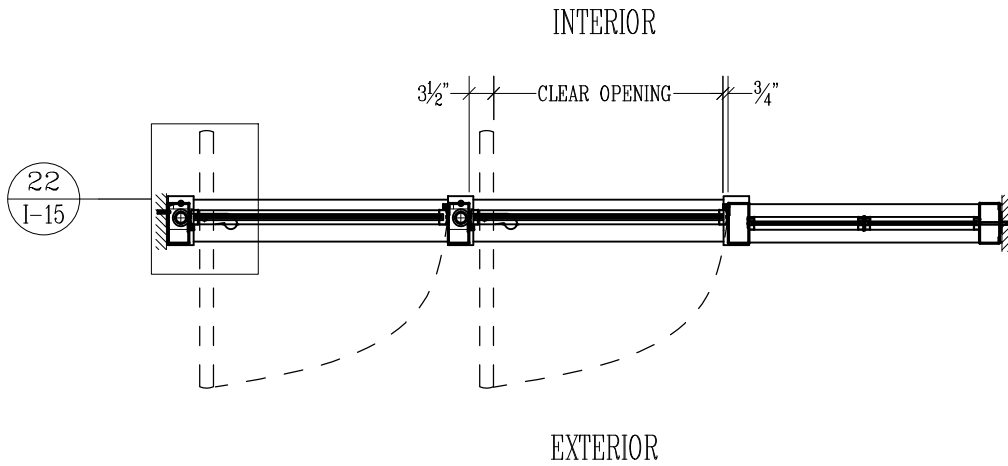


Exposed Shafts / Header (I-3)

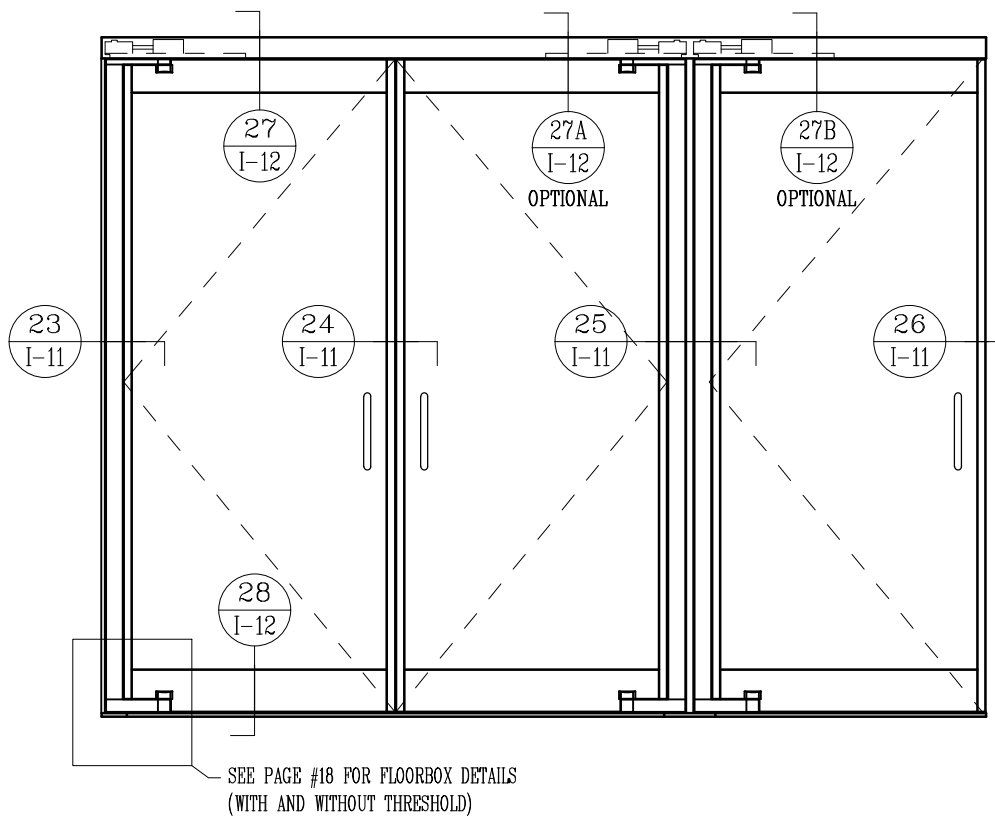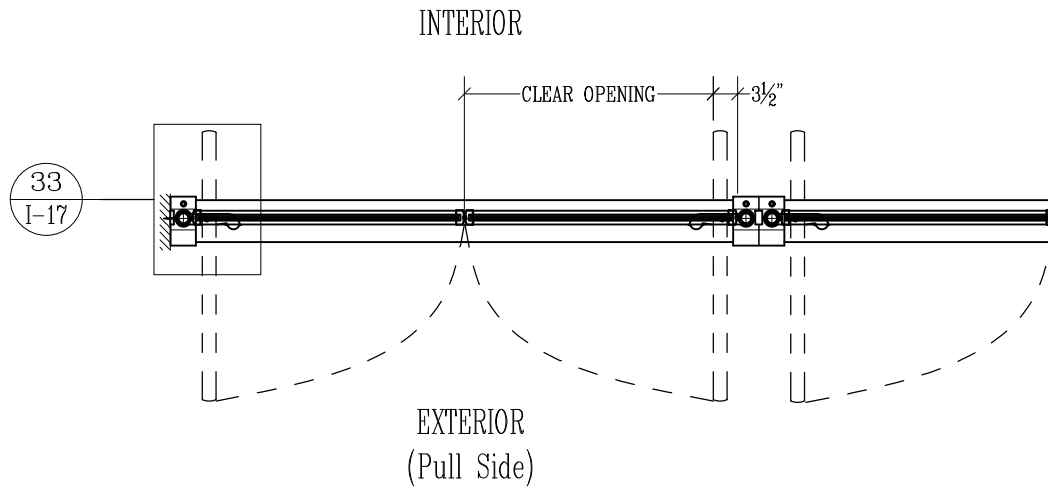



Exposed Shafts / Header / Tempered Glass Sidelights (I-4)

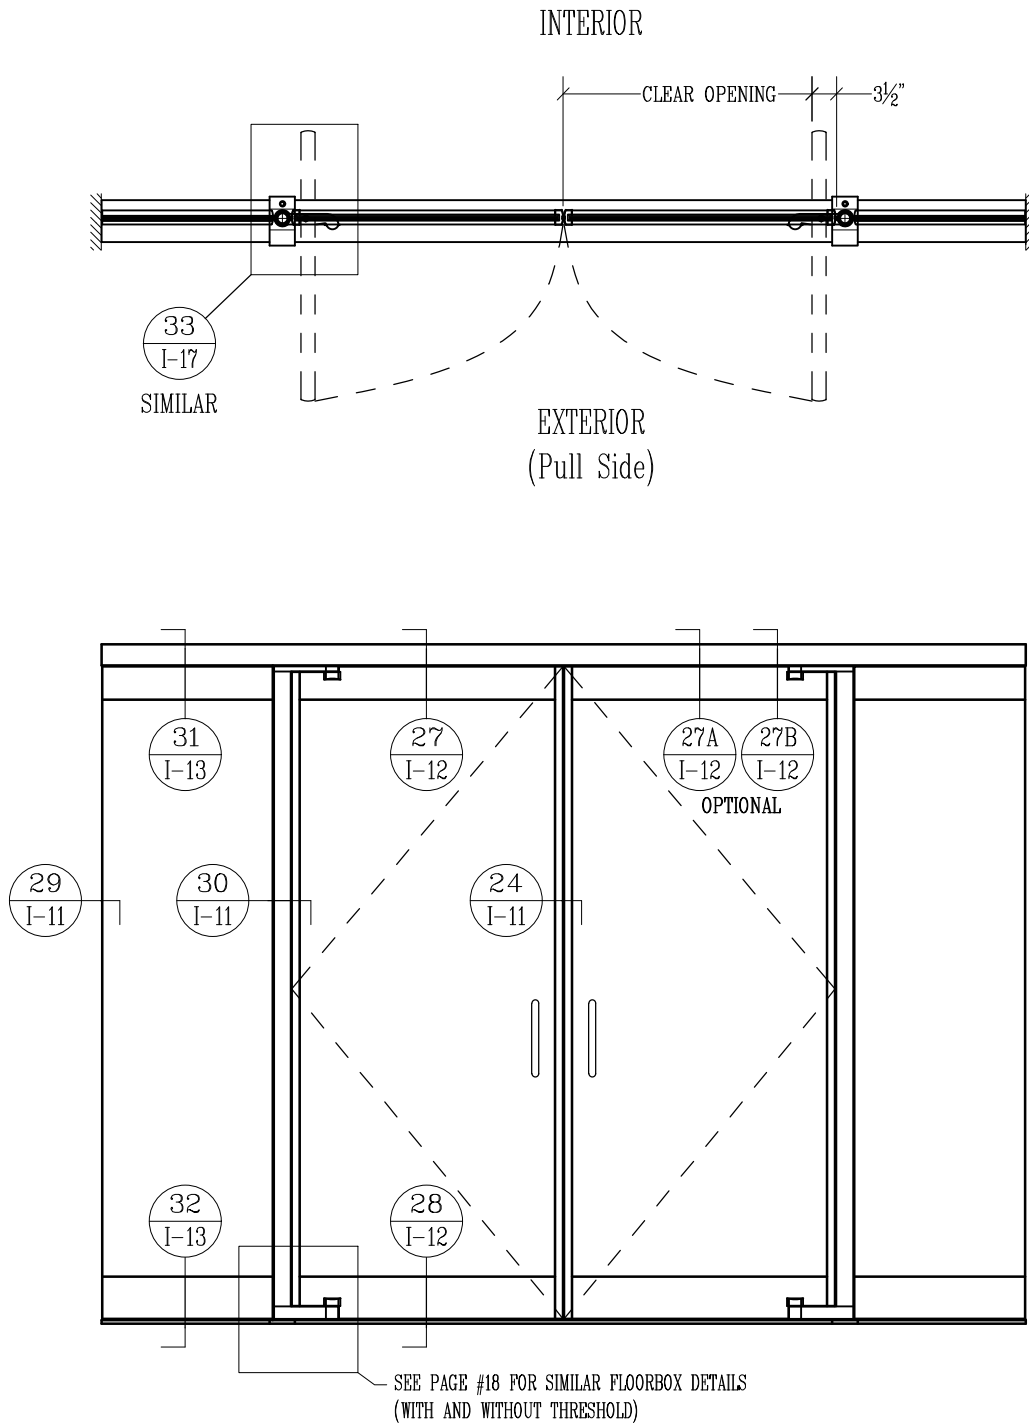


Concealed Shafts / Framed Sidelight and Transom (I-1)

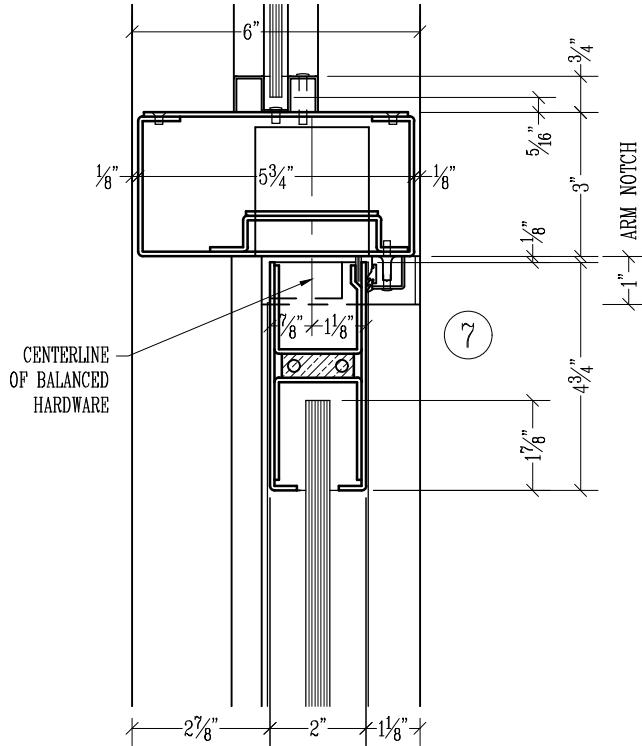

PULL SIDE

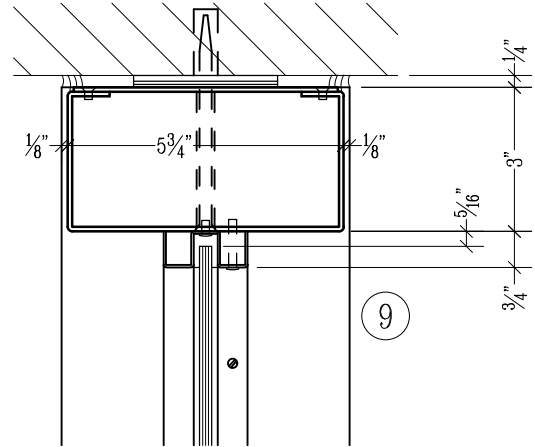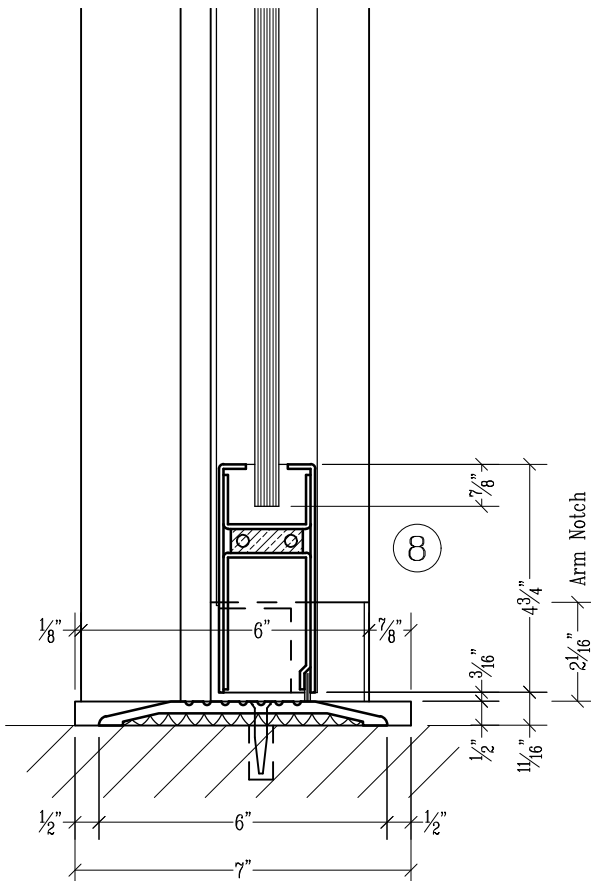


PULL SIDE

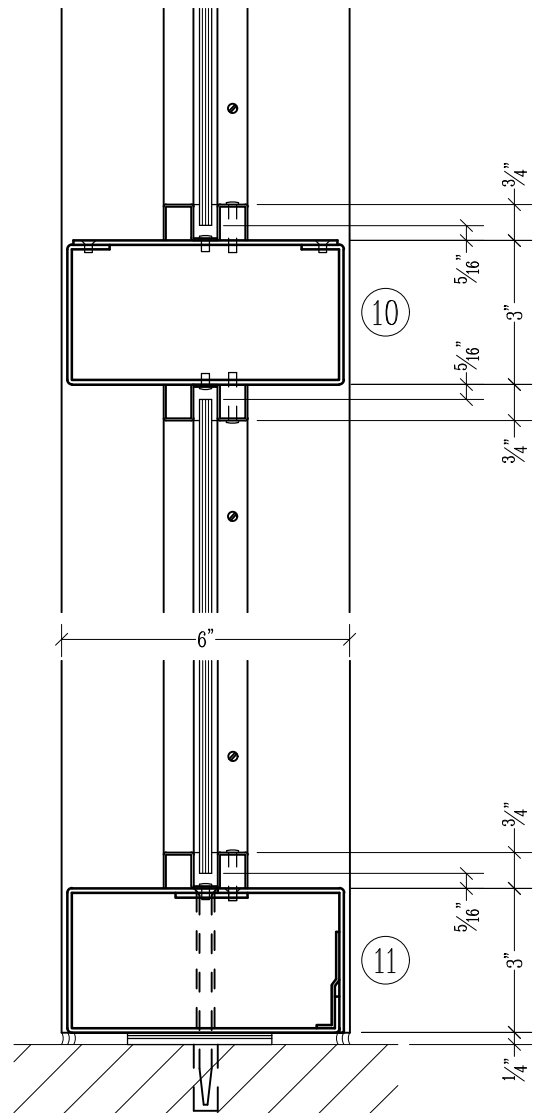





SCALE: 1/4" = 1"

Concealed Shafts / Framed Multi-Light Sidelight (I-2)

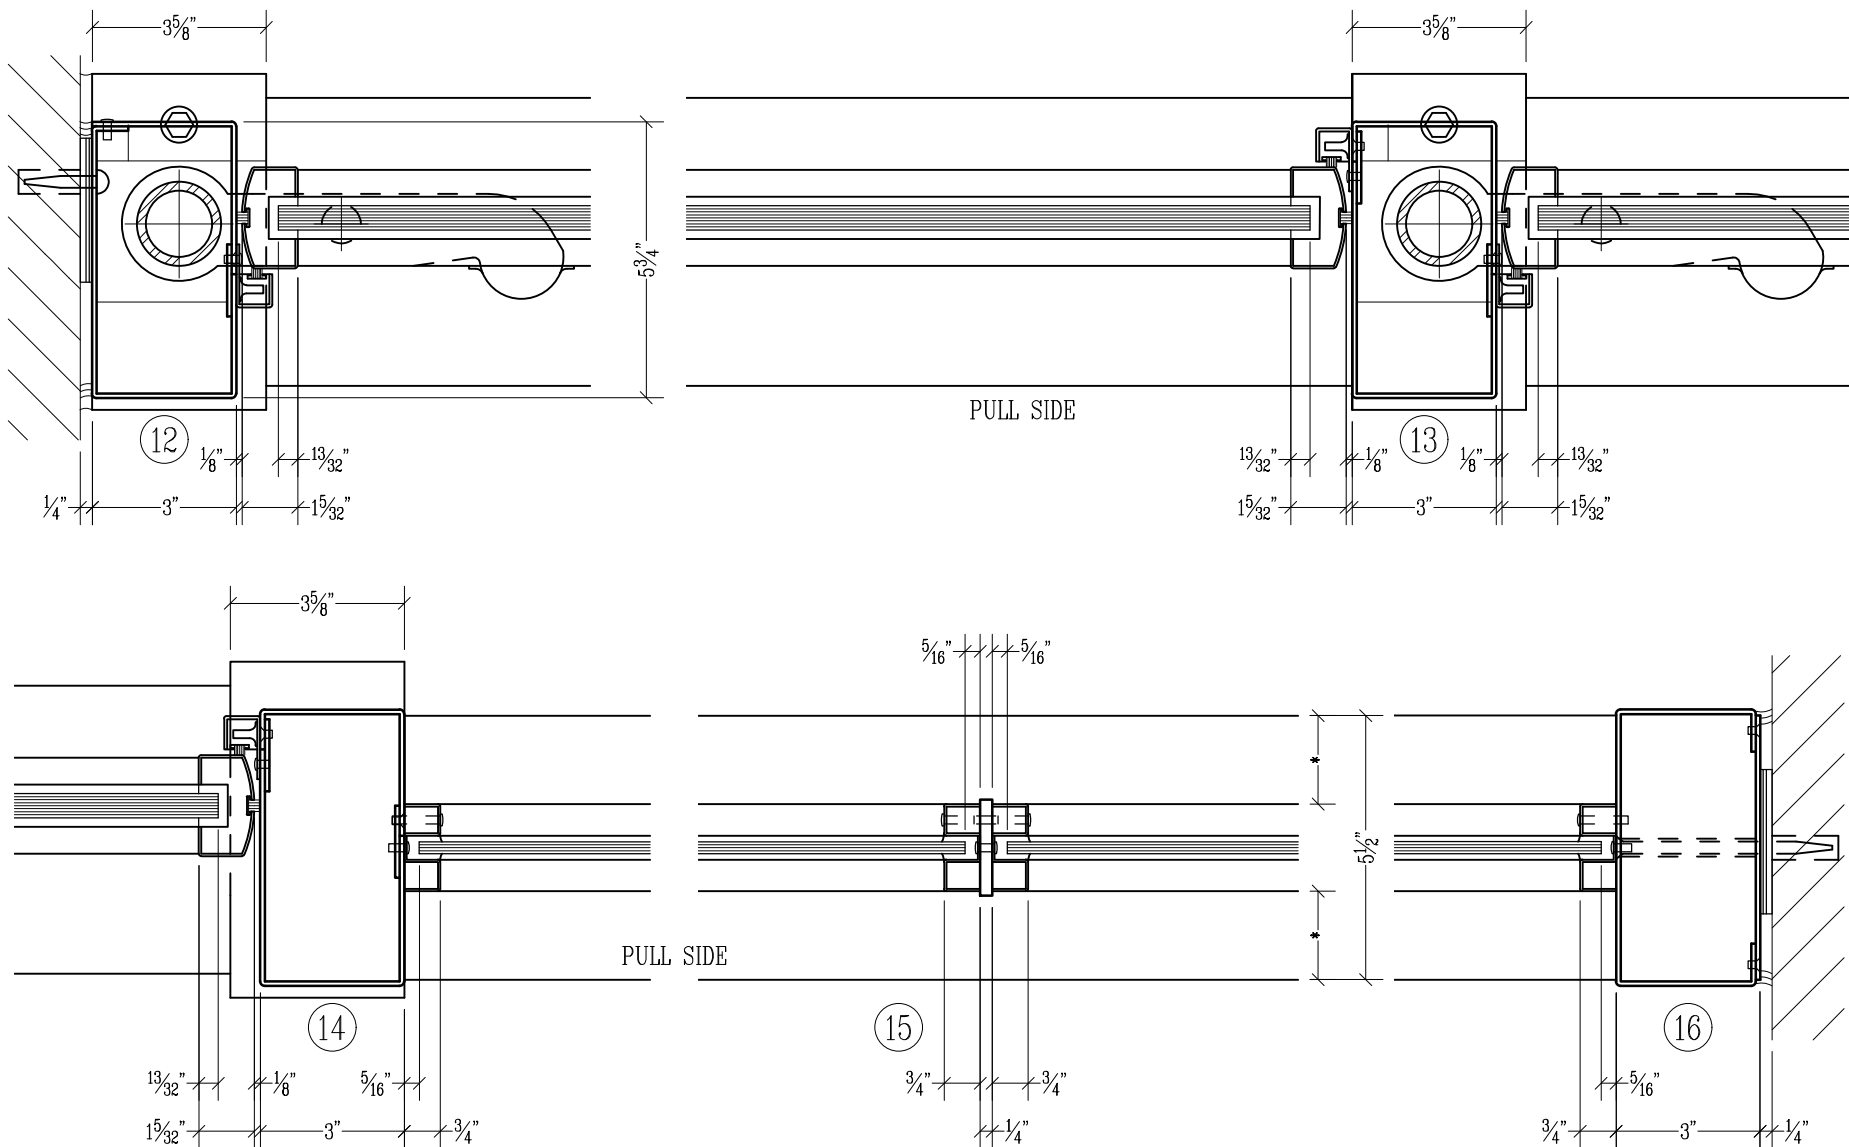


Page No. 9

Concealed Shafts / Optional 5" Deep Framing (I-1 & 2)

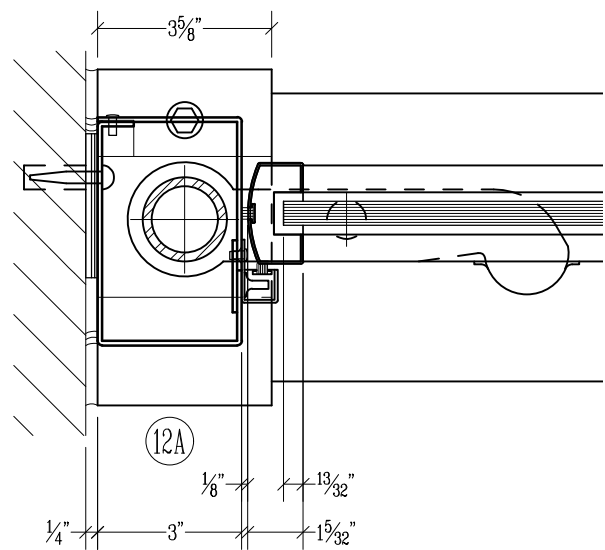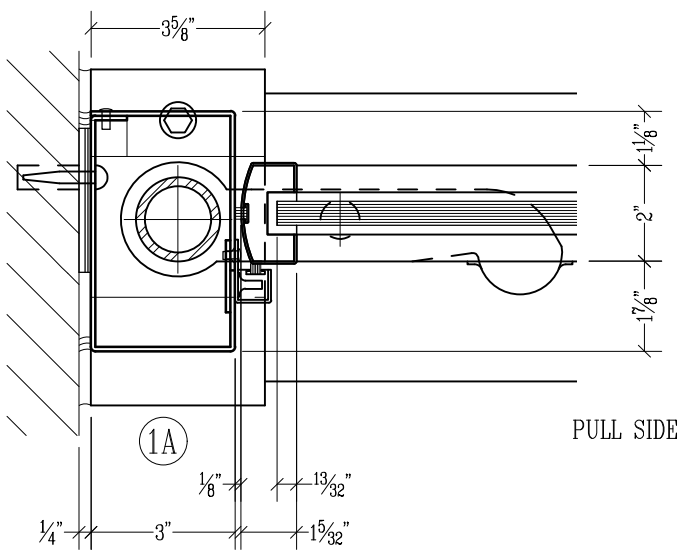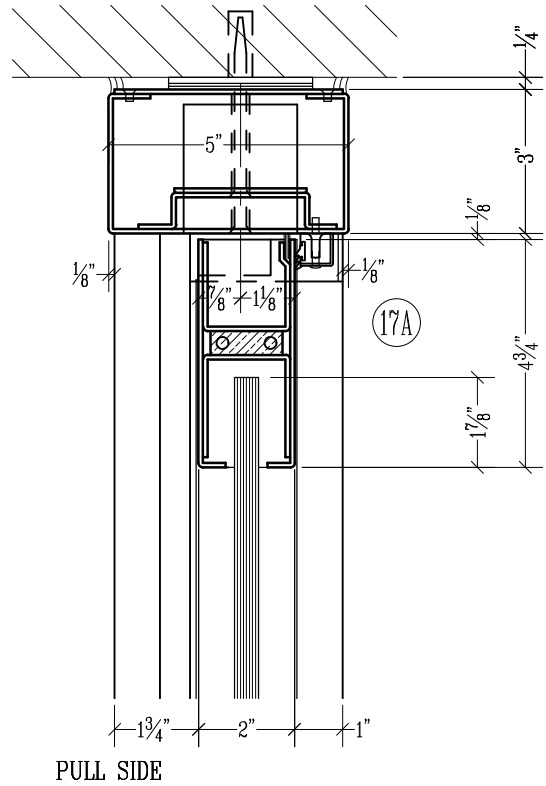
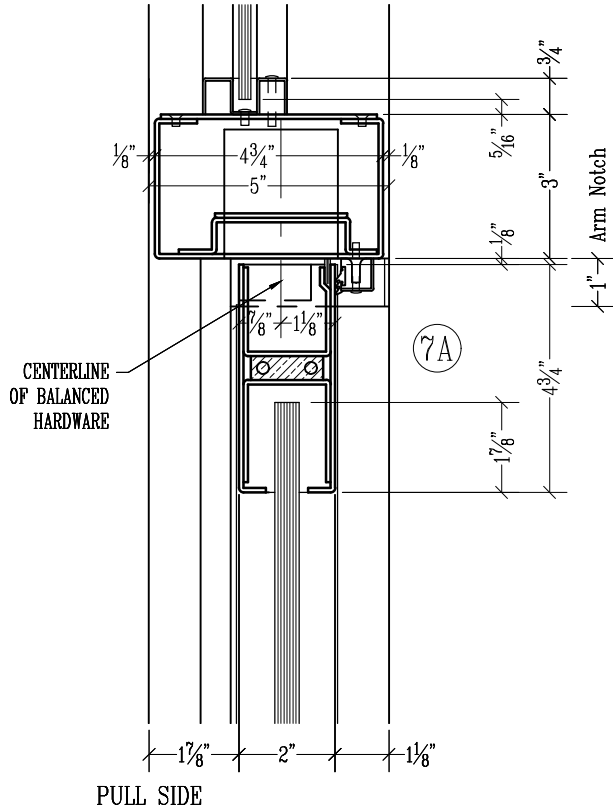


SCALE: 1/4" = 1"



Exposed Shafts / Header (I-3 & 4)

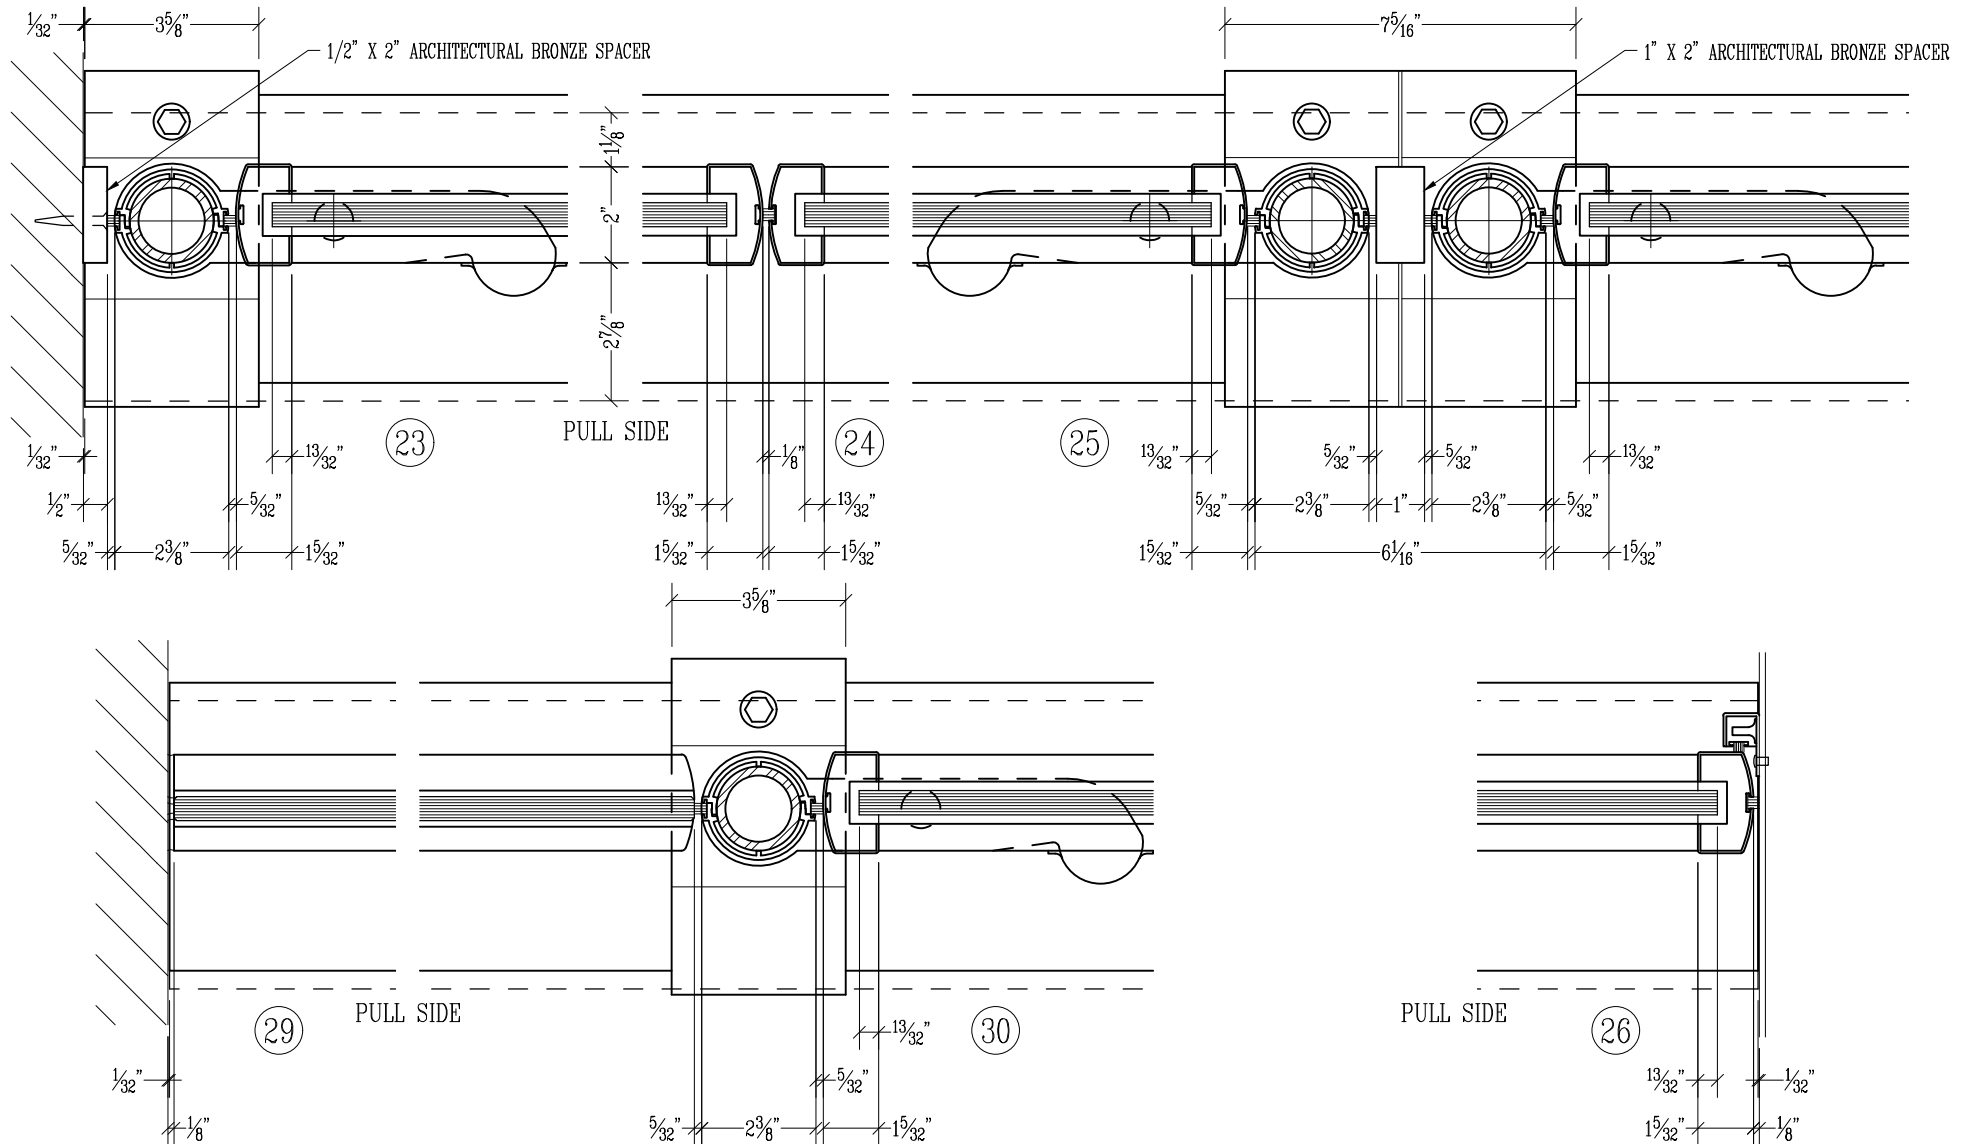

Exposed Shafts / Optional Header Framing (I-3 & 4)

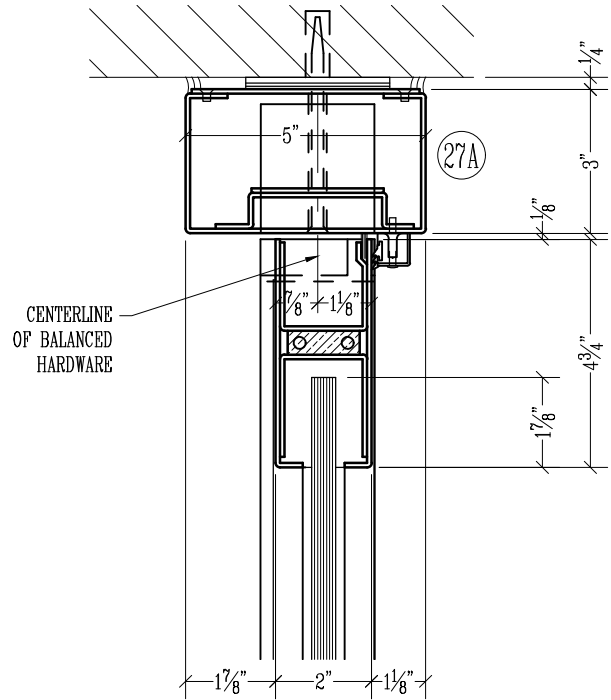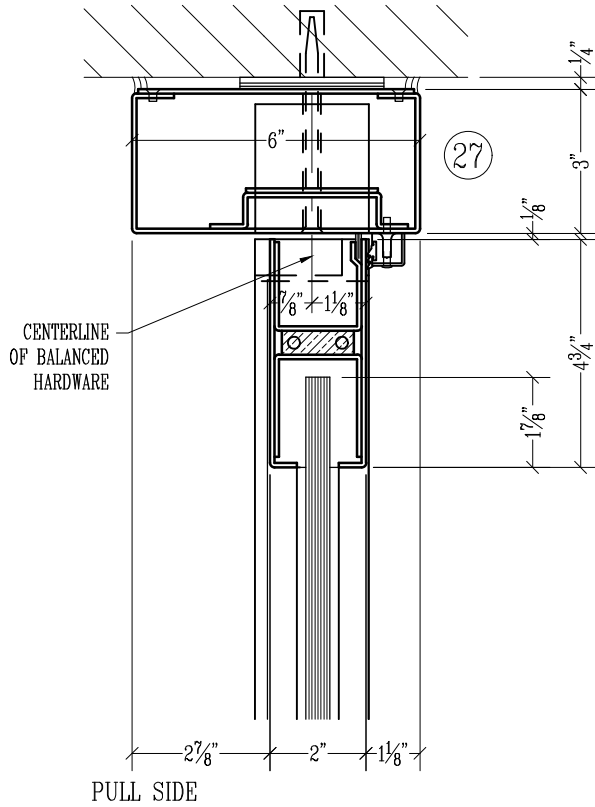


MORTISE REQUIRED FOR
BALANCED HARDWARE
AT HEAD

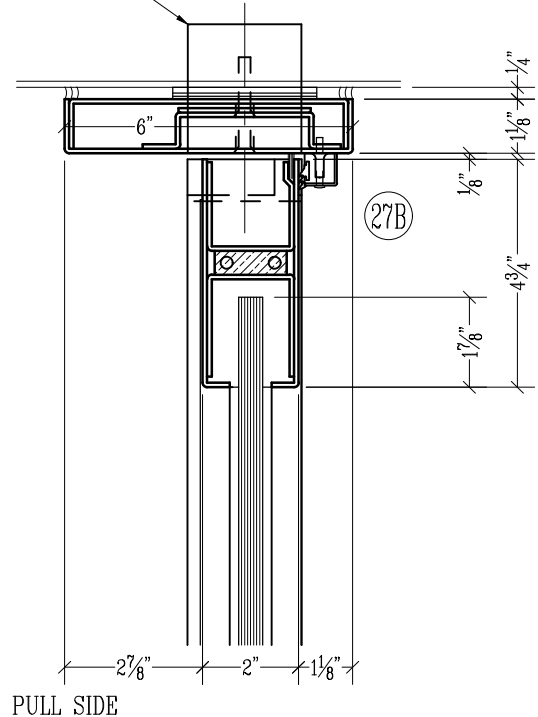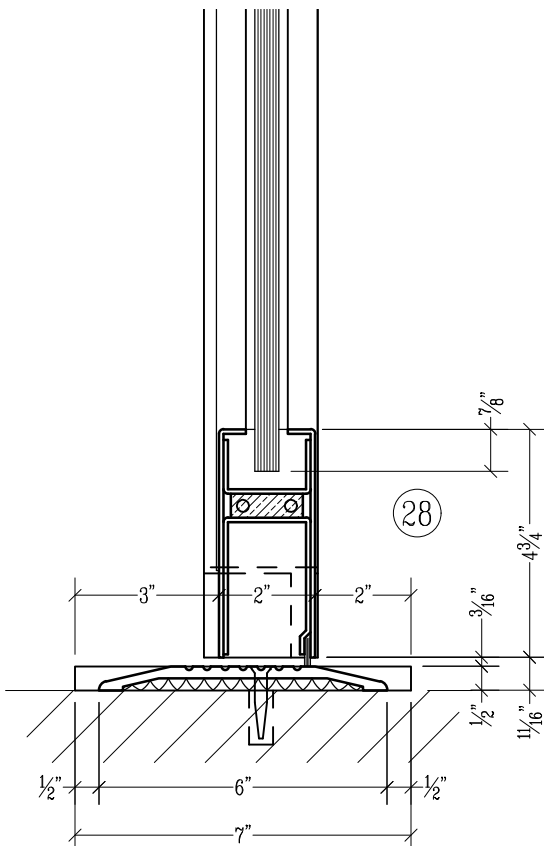






SCALE: 1/4" = 1"

Section I



FORMED-UP BRONZE GLASS STOPS FOR FRAMES.
(consult factory for special glass thickness)


Frame Glass
(Applied Stops)



Concealed Shafts (I-1 & 2)


NOTES:

1. Balanced hardware arm and door shown dotted, in the open position ("A" arm size shown).

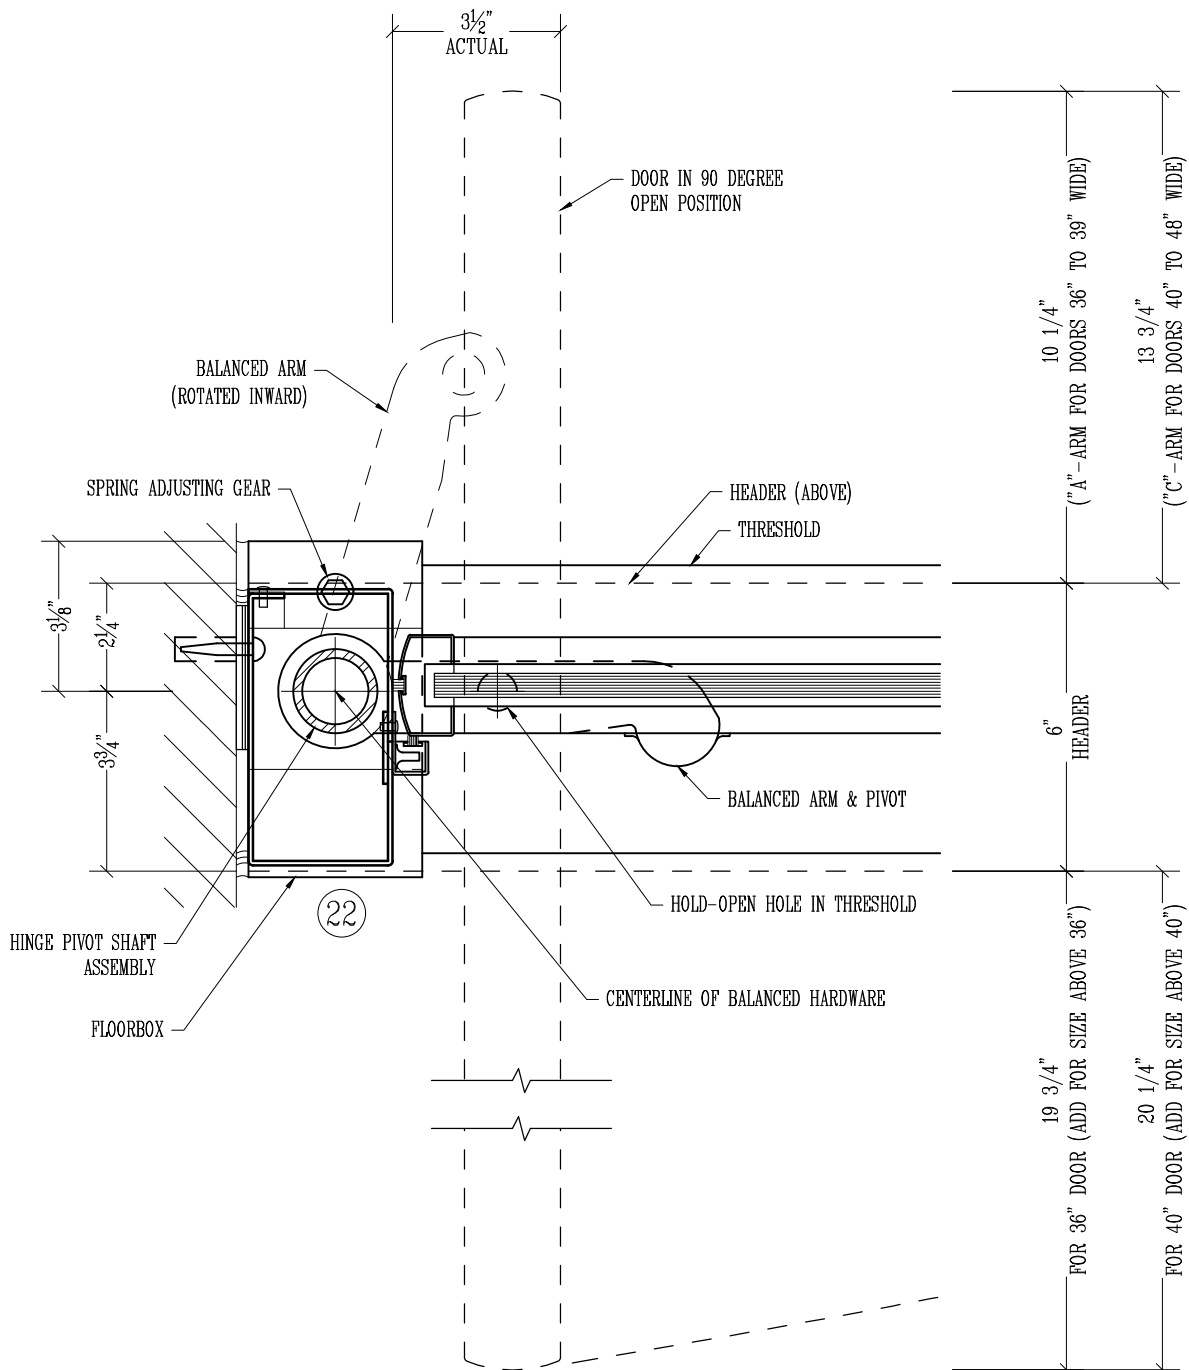


Concealed Shafts (I-1 & 2)

TYPICAL FLOORBOX LAYOUT AT HINGE JAMB.

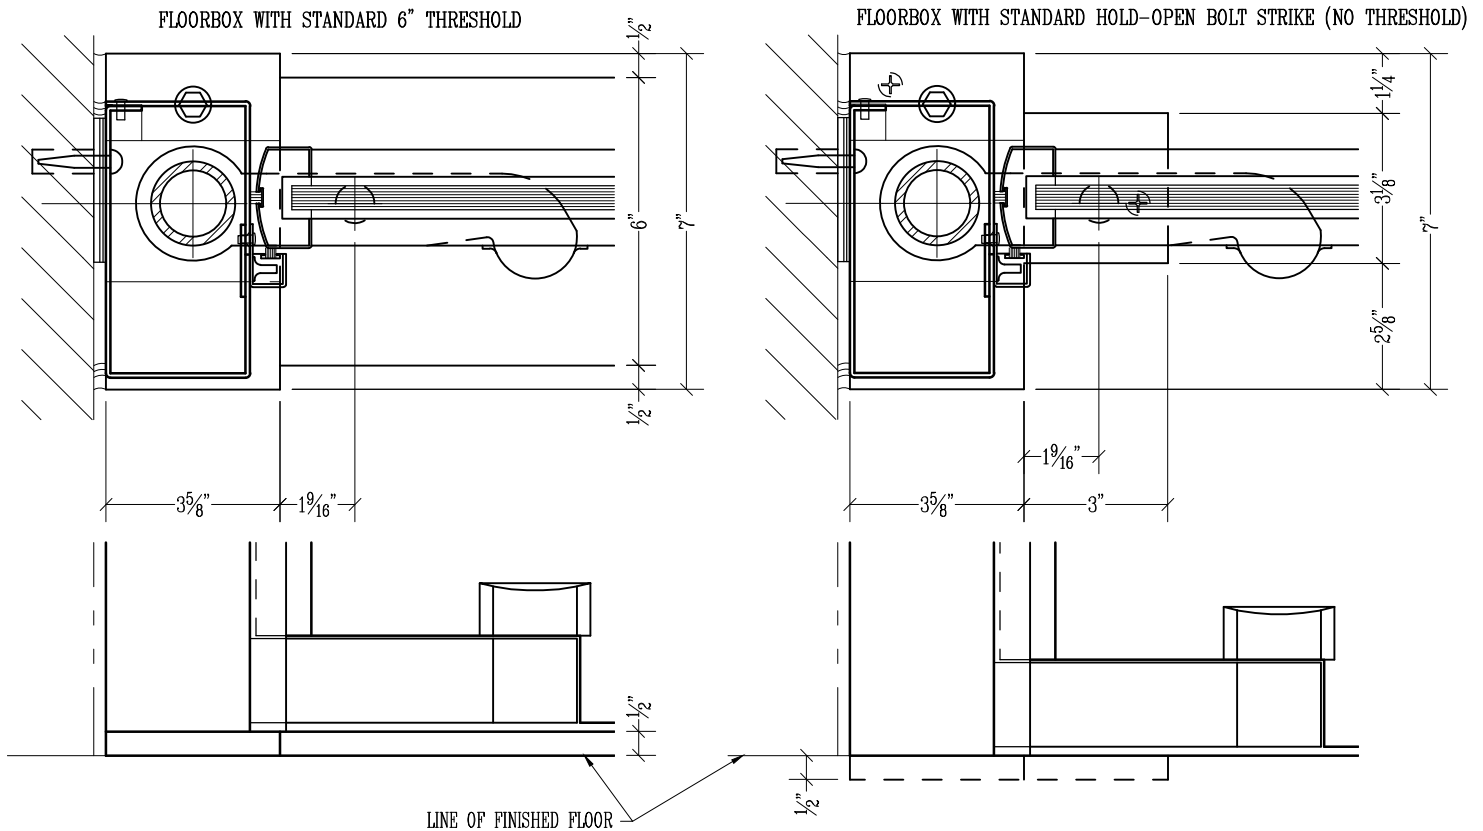

AVAILABLE THRESHOLD OPTIONS:


1. 1/2" x 6" Extruded thresholds are available in Aluminum (A) and Bronze (B).
2. 1/2" x 6" Formed-up stainless steel or bronze saddle type threshold shown (formed-up type can be made in different sizes & profiles - consult factory). Max width 6".



Exposed Shafts (I-3 & 4)


NOTES:

1. Balanced hardware arm and door shown dotted, in the open position ("A" arm size shown).

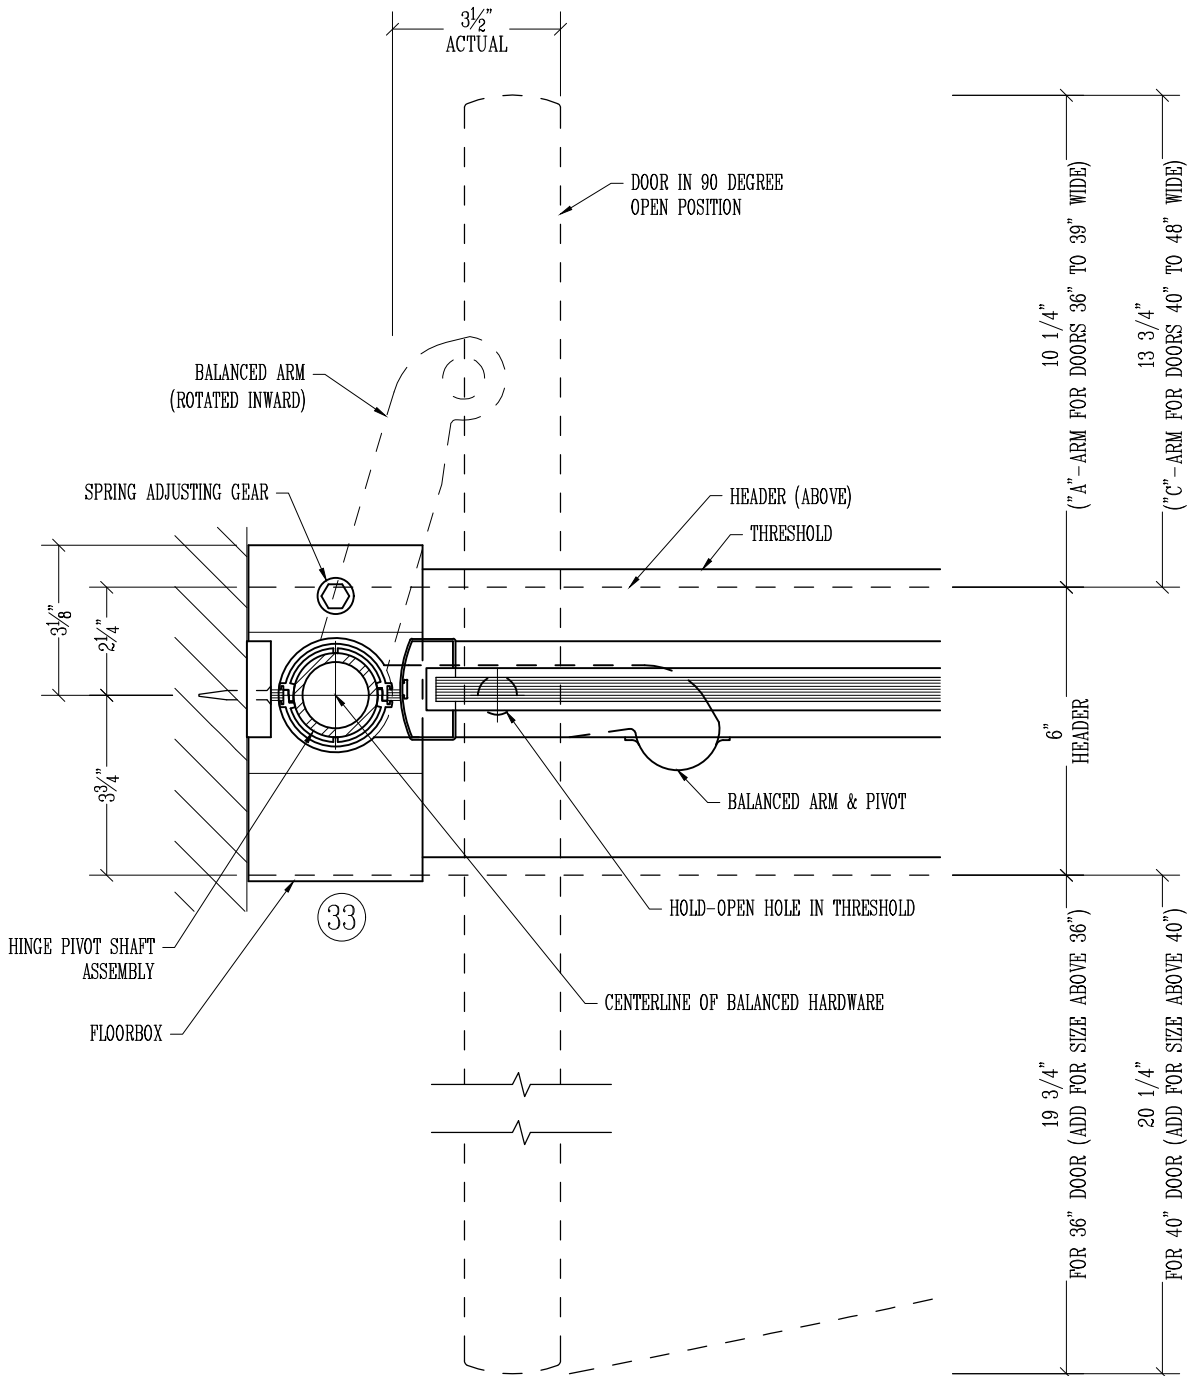

Exposed Shafts (I-3 & 4)

TYPICAL FLOORBOX LAYOUT AT HINGE JAMB.

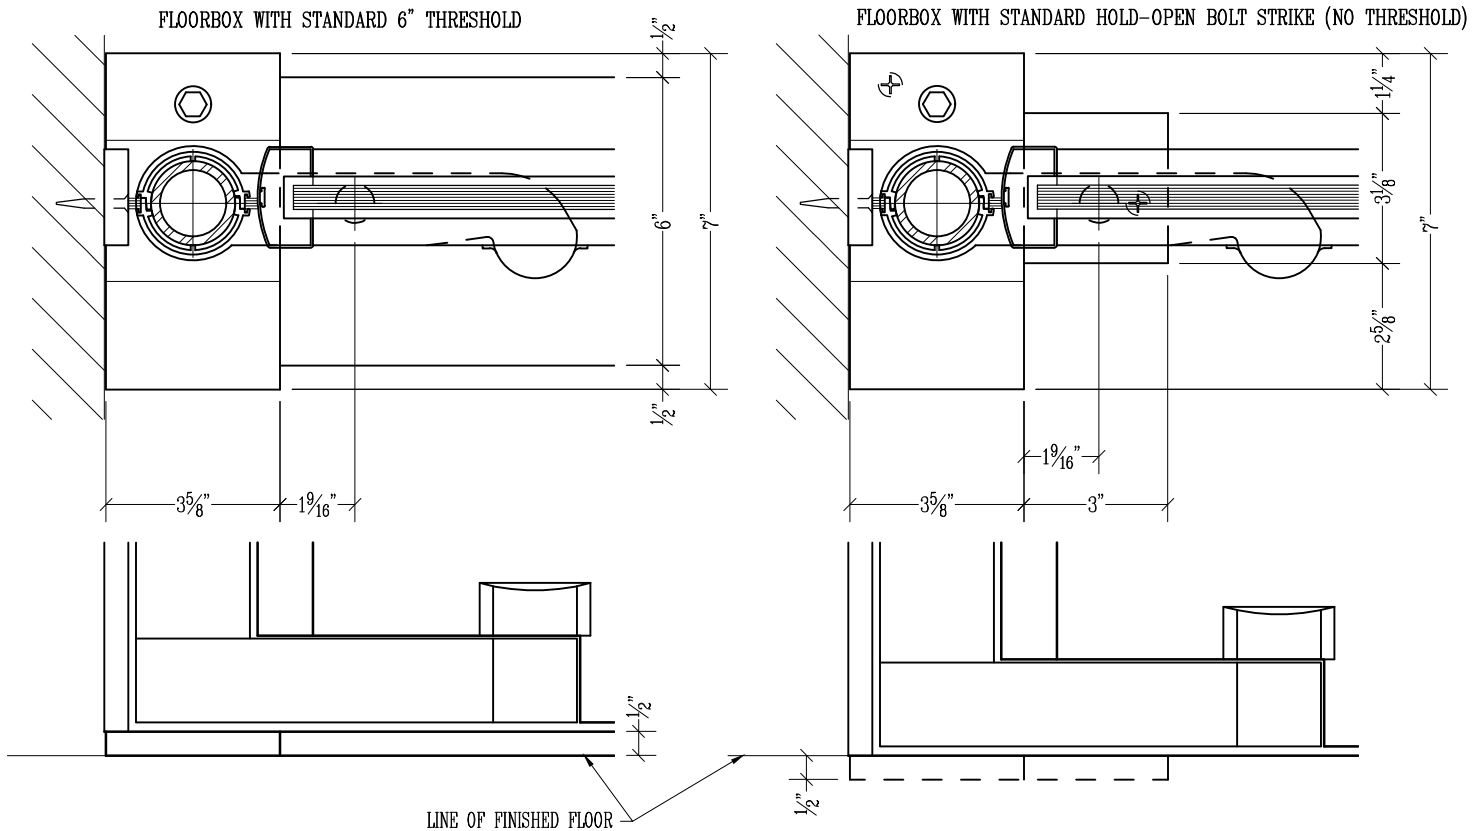

AVAILABLE THRESHOLD OPTIONS:

1. 1/2" x 6" Extruded thresholds are available in Aluminum (A) and Bronze (B).
2. 1/2" x 6" Formed-up stainless steel or bronze saddle type threshold shown (formed-up type can be made in different sizes & profiles - consult factory). Max width 6".

